

Hardware technology
for glass doors

STUDIO Hardware



Price List 2025

STUDIO OLIS
STUDIO ALEA
STUDIO VENA
Accessories



Contents

General information Page 3
 General Information Page 3
 Various possibilities for the highest of demands Page 4
 Benefits of consistent further development Page 5
 Materials and finishes Page 6
 Notes on use with laminated safety glass Page 7
 Corrosion protection classes according to DIN EN 1670 Page 7
 Definition of the DIN and opening direction of WC locks
 with a control knob Page 7



STUDIO OLIS Page 8

The image shows two views of the STUDIO OLIS hardware. On the left, a close-up of the silver-colored rectangular lock body with a black circular keyhole. On the right, the same lock is shown installed on a glass door in a modern interior setting with a red wall and a bookshelf in the background.




STUDIO ALEA..... Page 18

The image shows two views of the STUDIO ALEA hardware. On the left, a close-up of the silver-colored rectangular lock body with a black circular keyhole. On the right, the lock is shown installed on a glass door in a modern interior setting with red and blue spherical objects in the background.



STUDIO VENA..... Page 28

The image shows two views of the STUDIO VENA hardware. On the left, a close-up of the silver-colored rectangular lock body with a black circular keyhole. On the right, the lock is shown installed on a glass door in a modern interior setting with a stone wall and a white sink in the background.

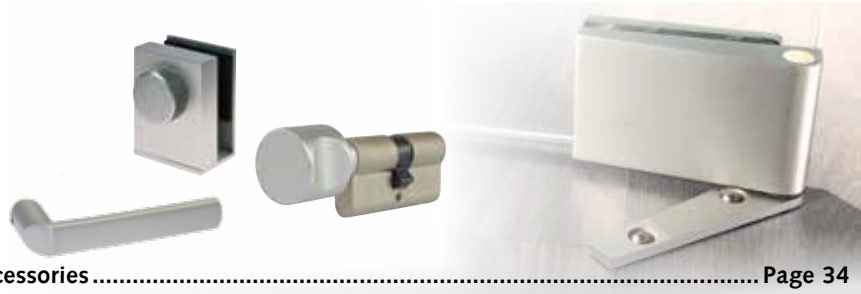

Accessories Page 34

The image shows three views of the accessories hardware. On the left, a close-up of a silver-colored rectangular lock body with a black circular keyhole. In the middle, a close-up of a silver-colored cylindrical lock body with a black circular keyhole. On the right, a close-up of a silver-colored rectangular lock body with a black circular keyhole.

Appendix Page 43
 Index Page 43
 General overview: Locks and hardware for glass Page 47

General Information

Warranty

We grant a 5 year warranty on the products of the series STUDIO OLIS, STUDIO ALEA and STUDIO VENA from the date of delivery.



Delivery

Deliveries will be made via UPS standard or forward agency ex works, excluding packaging, unless otherwise is specified with the order.

Prices

The prices are in Euro plus VAT, exclusive freight charges.

Charge for colour change

We charge 90,00€ net for articles in RAL powder coated (---.295) per special colour and order.

Extra charge for small quantities

We reserve the rights to charge a surcharge of 30,00€ for orders with a net value of less than 100,00€.

Re-consignment

We accept re-consignments only if the goods are new and originally packed within 6 weeks after delivery.

Please send us the re-consignment note for prior approval. Afterwards, please enclose the completed re-consignment note to the delivery. Download:

www.wss.de/en/service/retourenservice

Re-consignments cause inspection- and administration costs. These will be charged with up to 30% of the net value of order, but minimum with 40,00€ net.

General terms and conditions

We refer to our general terms and conditions.

Download: www.wss.de/en/agb



WSS
Wilh. Schlehtendahl & Söhne
GmbH & Co. KG

Various possibilities for the highest of demands

Lock types



	STUDIO OLIS	STUDIO ALEA	STUDIO VENA*
--	-------------	-------------	--------------

Locks

with handle guide and high clamping plate (standard latch fitted, noise-reducing latch enclosed)

Non-locking, handle positioned on the reverse side	✓	✓	✓
Non-locking, handle positioned at front	✓	✓	✓
Warded lock with 2 keys	✓	✓	✓
Prepared for profile cylinder	✓	✓	✓
WC lock	✓	✓	–
Striker box, large	✓	✓	–
Striker box, small**	✓	✓	✓

Versions

Flat clamping plate	✓	✓	✓
For door handles with roses***	✓	✓	–
Magnetic latch	✓	✓	✓
Lockable, no projection	✓	✓	✓



With handle guide



For door handles with roses



High clamping plate



Flat clamping plate

Note:

- * The locks in the “VENA” series are only available with a flat clamping plate.
- ** The “Striker box, small” is only available with a flat clamping plate.
- *** The “for door handles with roses” versions of the locks are usually supplied with a flat clamping plate.

Benefits of consistent further development



Noise-reducing latch

Also included with the delivery. The noise-reducing latch lets the latch fall against the striking plate gently. Locking noises are reduced to a minimum.

Standard latch

Fitted as standard



Magnetic latch

Optional. In a lock with a magnetic latch, the latch enters the striking plate on its own, quietly and smoothly, when the door is closed. When the door is open, the latch is fully retracted in the lock and does not protrude as in normal locks. The latch is fitted with a "negative" polarity. A magnetic insert and magnetic clips for the frame are also available (see page 58).

Warranty

We grant a 5-year warranty on the products in our STUDIO OLIS, STUDIO ALEA and STUDIO VENA series from the date of delivery.



Application

For use in private and commercial properties

Surfaces


High quality aluminium finishes with a stainless steel finish

Clamp follower

Optimum hold for the square spindle

Lockable, non-protruding

Optionally available for narrow frame profiles in which a projection of the latch and deadbolt is not possible (only 10mm frame depth necessary).




Lock insert

Noise-reducing

Adjustment of the door handle resistance

Progressively with the lock fitted

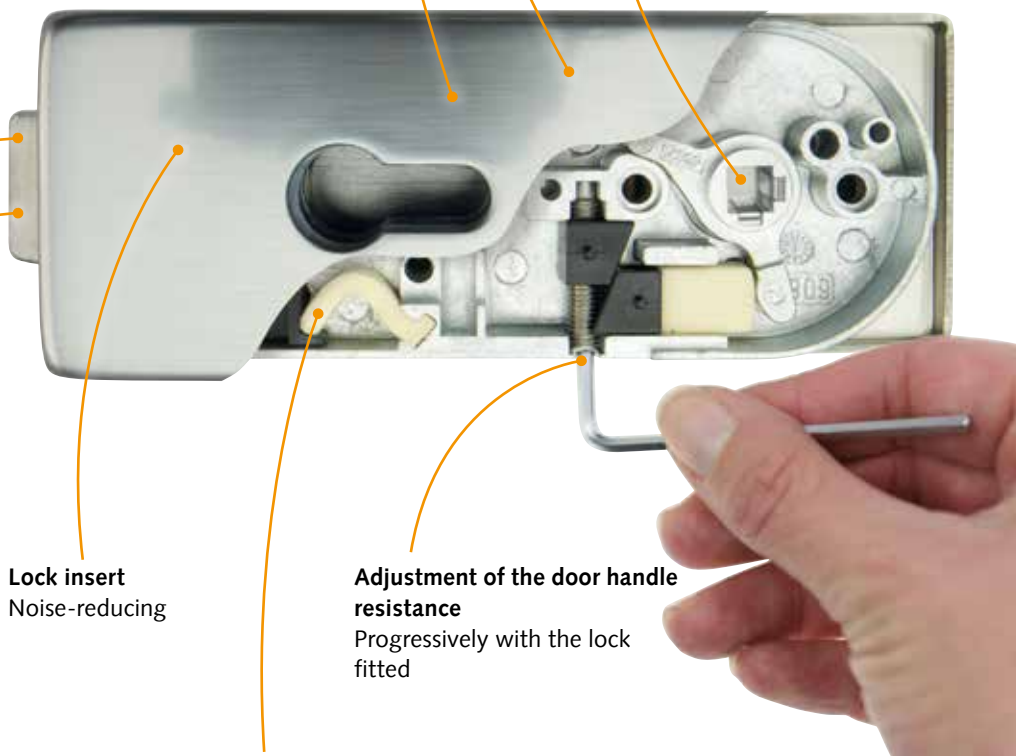Low-wear springs



Materials and finishes

Steel

- 010 = Galvanized
035 = Silver lacquered

Aluminium

Anodized according to EURAS standard colour swatch and standard colours (dip colouring):

- 112 = E4/C-0 silver anodized
114 = E6/C-0 silver anodized
137 = E4/C-31 stainless steel anodized
139 = E6/C-31 stainless steel anodized
174 = Polished chrome
198 = Stainless steel finish
199S = In special colour anodized
E4/EV3 brass anodized
E4/C34 dark bronze anodized
E4/C35 black anodized

Powder-coated (70% gloss level):

- 250 = RAL 9010 pure white powder coated
285 = RAL 9005 powder coated 30% GG matt
295 = RAL powder coated

Brass

- 325 = Matt nickel plated

Stainless steel

- 416 = Stainless Steel 304 polished
426 = Stainless Steel 304 matt brushed

Plastic

- 505 = Natural
550 = White
565 = Black
570 = Grey

Pre-treatment

- E4 = Polished and brushed
E6 = Chemical etching

Information

The choice of available materials and finishes may differ for individual products.

The colour samples are for your guidance only.
Differences in colour are possible due to printing.

Slight deviations in colour are possible on account of the materials and manufacturing process.

The dimensions of items made of different materials may differ slightly from those shown in the images.

Other finishes are possible. Please contact us if you require these.

Aluminium



E4/C-0 silver anodized
(---.112)



E4/C-31 stainless steel
anodized (---.137)



Polished chrome (---.174)



Stainless steel finish (---.198)

Stainless steel



Stainless Steel 304 polished
(---.416)



Stainless Steel 304 matt
brushed (---.426)



E4/C-0
silver anodized
(---.112)



E4/C-31
stainless steel anodized
(---.137)



stainless steel finish
(---.198)



RAL 9005
powder coated
30% GG matt
(---.285)

Notes on use with laminated safety glass

All of the locks and hardware in this catalogue, with a few exceptions, are also suitable for laminated safety glass (8,76 and 10,76 mm) of 2x toughened safety glass. Please contact us to clarify the technical details if necessary.

On account of the special properties of laminated safety glass, we recommend that the locks and hardware be stuck to the glass too.

Our technical information for toughened safety glass applies if laminated safety glass is used with pressure-resistant interlayer. The use of other laminated safety glasses is at your own risk.

Corrosion protection classes according to DIN EN 1670


The locks and hardware in the STUDIO series satisfy corrosion protection class 3, tested according to DIN EN 1670 (use in residential homes and public administrations).

We recommend OBJEKT locks and hardware, tested according to corrosion protection class 4, for doors in high humidity environments. The doors may be exposed temporarily to moisture from water spray or high atmospheric humidity (use: sanitary area and treatment rooms).


We do not recommend using the locks and hardware in swimming pools and salt-water baths with a significant chloride and/or sulphur dioxide load.

Corrosion protection	Corrosion resistance
Class 0	no defined resistance
Class 1	little resistance
Class 2	moderate resistance
Class 3	high resistance
Class 4	very high resistance

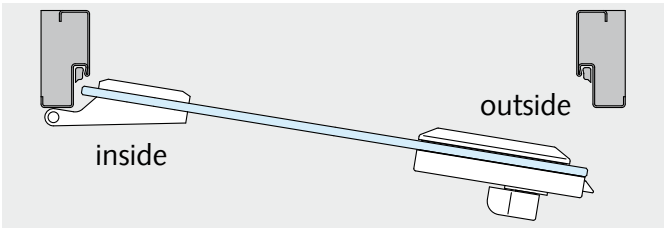
Definition of the DIN and opening direction of WC locks with a control knob



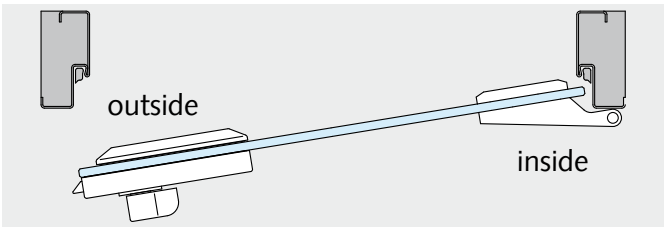
Control knob on lock side (DIN left inwards)



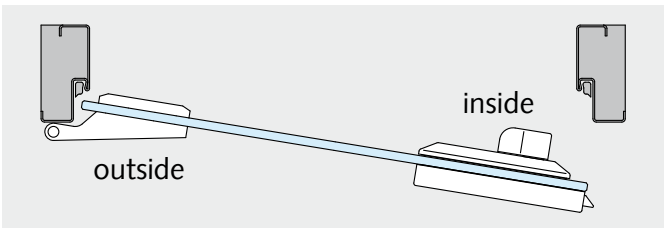Control knob on lock side (DIN right inwards)



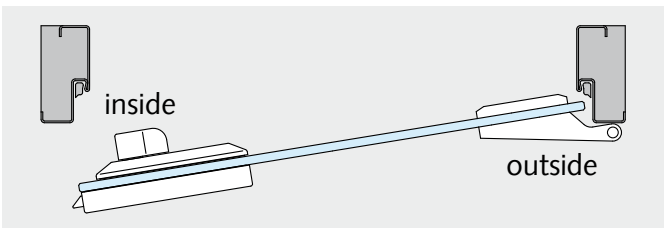Control knob on clamping plate side (DIN left outwards)



Control knob on clamping plate side (DIN right outwards)

STUDIO OLIS

Quality and technology.
The highest demands on
the quality of life and living.

The hardware can be ordered as sets **or** individual components.

Sets (lock **with** hinges) Page 9–11
Individual components (lock **or** hinges)Page 12–17

Technical data:


Glass:	8 and 10mm toughened safety glass (12 mm on request) 8,76 and 10,76mm laminated safety glass of 2x toughened safety glass
Door weight:	max. 47 kg (hinges for private sector) max. 60 kg (hinges for commercial properties)
Door width:	max. 1.000mm
Frame rebate depth:	24 to 45 mm possible
Lock:	analogous DIN EN 12209 tested with 1,5 million closing cycles (specification: 500.000 closing cycles)
Corrosion protection:	analogous DIN EN 1670 / Class 3
Deadbolt projection:	20mm (1-turn)
Hinge:	analogous DIN EN 1935 tested with 200.000 closing cycles (private sector) and 500.000 closing cycles (commercial property)
Use:	Installation in frames according to DIN 18101/18111




Features:

- Locks for use in residential homes and commercial properties
- Hinges optionally for residential homes or commercial properties
- Lock and hinge in a rounded design
- Lock with standard and noise-reducing latch
- Lock can be used on the left/right
- Lock optionally with high or flat clamping plate
- Lock optionally with magnetic latch too
- Lock optionally as lockable, no projection
- Lock with low-wear springs
- Optimum hold for the square spindle thanks to the clamp follower
- Progressive adjustment of the door handle resistance
- For standard handles with 18mm shoulder guide, optionally also with handle roses
- With 10mm toughened safety glass and 24mm frame rebate depth, the latch head can be supplied machined (surcharge 20,13 €/piece gross)

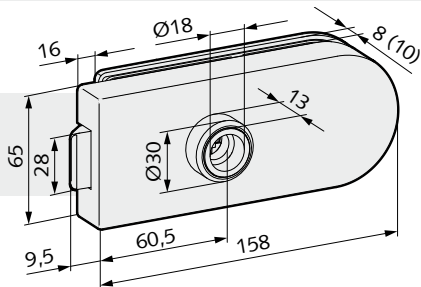UV lock
Handle position
front




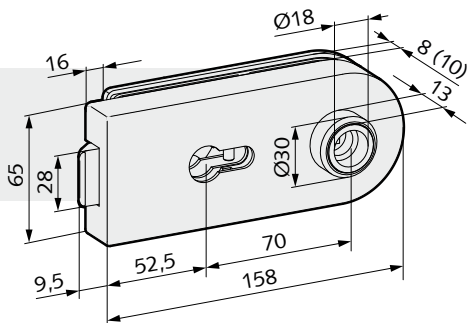PC lock
prepared for
profile cylinder
(PC)




Total thickness: Lock with high clamping plate 45 (47) mm
Lock with flat clamping plate 40 (42) mm


Hinge with sleeve
for 24 mm
frame rebate depth
(residential homes)



Hinge with sleeve
for 24 mm frame rebate depth
(commercial properties)



Hinge with fixing plate
for non-rebated door frames
(commercial properties)



Sets


Sets						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
						Al RAL 9005 powder coat. 30% gloss level matt ---.285				
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		
STUDIO locks with STUDIO hinges										

Scope of delivery:


- 1 lock with handle guide of your choice
- 2 STUDIO hinges with sleeves



UV lock, Handle positioned on the reverse side

	20.100.0500.---		8 (10)	high	Standard			
	20.101.0500.---		8 (10)	flat	Standard	147,67	177,19	213,50

UV lock, Handle positioned at front

	20.102.0500.---		8 (10)	high	Standard			
	20.103.0500.---		8 (10)	flat	Standard	147,67	177,19	213,50


BB lock

	20.104.0500.---		8 (10)	high	Standard			
	20.105.0500.---		8 (10)	flat	Standard	147,67	177,19	213,50


PC lock

	20.106.0500.---		8 (10)	high	Standard			
	20.107.0500.---		8 (10)	flat	Standard	147,67	177,19	213,50


WC lock, With control knob on lock side

	20.112.0411.---	DIN left, inwards	8	high	Standard			
	20.112.0421.---	DIN right, inwards	8	high	Standard			
	20.113.0411.---	DIN left, inwards	8	flat	Standard	198,03	237,64	276,77
	20.113.0421.---	DIN right, inwards	8	flat	Standard			

WC lock, With control knob on clamping plate side

	20.114.0412.---	DIN left, outwards	8	high	Standard			
	20.114.0422.---	DIN right, outwards	8	high	Standard			
	20.115.0412.---	DIN left, outwards	8	flat	Standard	198,03	237,64	276,77
	20.115.0422.---	DIN right, outwards	8	flat	Standard			

GK striker box, large

	20.146.0500.---		8 (10)	high				
	20.147.0500.---		8 (10)	flat		156,33	187,60	224,89

GK striker box, small

	20.149.0500.---		8 (10)	flat		156,33	187,60	224,89
---	-----------------	--	--------	------	--	--------	--------	--------

¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.

Sets


						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
							Al RAL 9005 powder coat. 30% gloss level matt ---.285			
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		
STUDIO locks with OBJEKT hinges										

Scope of delivery:

- 1 lock with handle guide of your choice
- 2 OBJEKT hinges with sleeves



UV lock, Handle positioned on the reverse side

	20.100.1500.---	8 (10)	high	Standard		155,67	185,20	221,50
	20.101.1500.---	8 (10)	flat	Standard				

UV lock, Handle positioned at front

	20.102.1500.---	8 (10)	high	Standard		155,67	185,20	221,50
	20.103.1500.---	8 (10)	flat	Standard				


BB lock

	20.104.1500.---	8 (10)	high	Standard		155,67	185,20	221,50
	20.105.1500.---	8 (10)	flat	Standard				


PC lock

	20.106.1500.---	8 (10)	high	Standard		155,67	185,20	221,50
	20.107.1500.---	8 (10)	flat	Standard				

WC lock, With control knob on lock side

	20.112.1411.---	DIN left, inwards	8	high	Standard			
	20.112.1421.---	DIN right, inwards	8	high	Standard			
	20.113.1411.---	DIN left, inwards	8	flat	Standard	206,01	245,63	284,79
	20.113.1421.---	DIN right, inwards	8	flat	Standard			

WC lock, With control knob on clamping plate side

	20.114.1412.---	DIN left, outwards	8	high	Standard			
	20.114.1422.---	DIN right, outwards	8	high	Standard			
	20.115.1412.---	DIN left, outwards	8	flat	Standard	206,01	245,63	284,79
	20.115.1422.---	DIN right, outwards	8	flat	Standard			

GK striker box, large

	20.146.1500.---	8 (10)	high			164,35	195,61	232,90
	20.147.1500.---	8 (10)	flat					

GK striker box, small

	20.149.1500.---	8 (10)	flat			164,35	195,61	232,90
---	-----------------	--------	------	--	--	--------	--------	--------

¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.

Sets


						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
							Al RAL 9005 powder coat. 30% gloss level matt ---.285			
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		
STUDIO locks with OBJEKT hinges with fixing plate										

Scope of delivery:


- 1 lock with handle guide of your choice
- 2 OBJEKT hinges with fixing plate



UV lock, Handle positioned on the reverse side

	20.100.2500.---		8 (10)	high	Standard			
	20.101.2500.---		8 (10)	flat	Standard	191,66	221,21	257,51


UV lock, Handle positioned at front

	20.102.2500.---		8 (10)	high	Standard			
	20.103.2500.---		8 (10)	flat	Standard	191,66	221,21	257,51


BB lock

	20.104.2500.---		8 (10)	high	Standard			
	20.105.2500.---		8 (10)	flat	Standard	191,66	221,21	257,51


PC lock

	20.106.2500.---		8 (10)	high	Standard			
	20.107.2500.---		8 (10)	flat	Standard	191,66	221,21	257,51


WC lock, With control knob on lock side

	20.112.2411.---	DIN left, inwards	8	high	Standard			
	20.112.2421.---	DIN right, inwards	8	high	Standard			
	20.113.2411.---	DIN left, inwards	8	flat	Standard	242,02	281,64	320,78
	20.113.2421.---	DIN right, inwards	8	flat	Standard			

WC lock, With control knob on clamping plate side

	20.114.2412.---	DIN left, outwards	8	high	Standard			
	20.114.2422.---	DIN right, outwards	8	high	Standard			
	20.115.2412.---	DIN left, outwards	8	flat	Standard	242,02	281,64	320,78
	20.115.2422.---	DIN right, outwards	8	flat	Standard			

GK striker box, large






	20.146.2500.---		8 (10)	high				
	20.147.2500.---		8 (10)	flat		200,34	231,62	268,90

GK striker box, small




	20.149.2500.---		8 (10)	flat		200,34	231,62	268,90
---	-----------------	--	--------	------	--	--------	--------	--------

¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.





Locks

Locks						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199 S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
UV lock, Handle positioned on the reverse side										
With handle guide										
	20.200.0500.---		8 (10)	high	Standard	102,92	123,50	277,35	143,40	184,89
	20.201.0500.---		8 (10)	flat	Standard					
	20.200.6500.---		8 (10)	high	Magnet	142,92	163,51	317,36	183,41	224,90
	20.201.6500.---		8 (10)	flat	Magnet					
For door handles with roses										
	20.225.0500.---		8 (10)	flat	Standard	129,59	150,19	304,01	170,08	211,57
	20.225.6500.---		8 (10)	flat	Magnet	169,60	190,18	344,03	210,07	251,57
UV lock, Handle positioned at front										
With handle guide										
	20.202.0500.---		8 (10)	high	Standard	102,92	123,50	277,35	143,40	184,89
	20.203.0500.---		8 (10)	flat	Standard					
	20.202.6500.---		8 (10)	high	Magnet	142,92	163,51	317,36	183,41	224,90
	20.203.6500.---		8 (10)	flat	Magnet					
For door handles with roses										
	20.227.0500.---		8 (10)	flat	Standard	129,59	150,19	304,01	170,08	211,57
	20.227.6500.---		8 (10)	flat	Magnet	169,60	190,18	344,03	210,07	251,57
BB lock										
With handle guide										
	20.204.0500.---		8 (10)	high	Standard	102,92	123,50	277,35	143,40	184,89
	20.205.0500.---		8 (10)	flat	Standard					
With handle guide, lockable, no projection										
	20.204.5500.---		8 (10)	high	Standard	116,27	136,85	290,69	156,74	198,23
	20.205.5500.---		8 (10)	flat	Standard					
	20.204.6500.---		8 (10)	high	Magnet	142,92	163,51	317,36	183,41	224,90
	20.205.6500.---		8 (10)	flat	Magnet					
For door handles with roses										
	20.235.0500.---		8 (10)	flat	Standard	129,59	150,19	304,01	170,08	211,57
For door handles with roses, lockable, no projection										
	20.235.5500.---		8 (10)	flat	Standard	142,92	163,51	317,36	183,41	224,90
	20.235.6500.---		8 (10)	flat	Magnet	169,60	190,18	344,03	210,07	251,57

Locks






						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199 S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
PC lock										
With handle guide										
	20.206.0500.---		8 (10)	high	Standard					
	20.207.0500.---		8 (10)	flat	Standard	102,92	123,50	277,35	143,40	184,89
With handle guide, lockable, no projection										
	20.206.5500.---		8 (10)	high	Standard	116,27	136,85	290,69	156,74	198,23
	20.207.5500.---		8 (10)	flat	Standard					
	20.206.6500.---		8 (10)	high	Magnet	142,92	163,51	317,36	183,41	224,90
	20.207.6500.---		8 (10)	flat	Magnet					
For door handles with roses										
	20.245.0500.---		8 (10)	flat	Standard	129,59	150,19	304,01	170,08	211,57
For door handles with roses, lockable, no projection										
	20.245.5500.---		8 (10)	flat	Standard	142,92	163,51	317,36	183,41	224,90
	20.245.6500.---		8 (10)	flat	Magnet	169,60	190,18	344,03	210,07	251,57
PC lock with PC rose										
With handle guide										
	20.210.0500.---		8 (10)	high	Standard	137,96	165,56	329,95	178,46	219,95
With handle guide, lockable, no projection										
	20.210.5500.---		8 (10)	high	Standard	151,30	178,90	343,29	191,78	233,30
	20.210.6500.---		8 (10)	high	Magnet	177,95	205,56	369,95	218,46	259,97

Locks

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
WC lock, With control knob on lock side										
With handle guide										
	20.220.0411.---	DIN left, inwards	8	high	Standard					
	20.220.0421.---	DIN right, inwards	8	high	Standard					
	20.221.0411.---	DIN left, inwards	8	flat	Standard	159,07	190,88	365,19	214,35	243,45
	20.221.0421.---	DIN right, inwards	8	flat	Standard					
With handle guide, lockable, no projection										
	20.220.5411.---	DIN left, inwards	8	high	Standard					
	20.220.5421.---	DIN right, inwards	8	high	Standard					
	20.221.5411.---	DIN left, inwards	8	flat	Standard	172,40	204,22	378,51	227,69	256,77
	20.221.5421.---	DIN right, inwards	8	flat	Standard					
	20.220.6411.---	DIN left, inwards	8	high	Magnet					
	20.220.6421.---	DIN right, inwards	8	high	Magnet					
	20.221.6411.---	DIN left, inwards	8	flat	Magnet	199,08	230,89	405,18	254,35	283,46
	20.221.6421.---	DIN right, inwards	8	flat	Magnet					
For door handles with roses										
	20.277.0411.---	DIN left, inwards	8	flat	Standard					
	20.277.0421.---	DIN right, inwards	8	flat	Standard	185,73	217,55	391,85	241,00	270,11
For door handles with roses										
	20.277.5411.---	DIN left, inwards	8	flat	Standard					
	20.277.5421.---	DIN right, inwards	8	flat	Standard	199,08	230,89	405,18	254,35	283,46
	20.277.6411.---	DIN left, inwards	8	flat	Magnet					
	20.277.6421.---	DIN right, inwards	8	flat	Magnet	225,74	257,55	431,84	281,03	310,12





¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.

Locks

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
WC lock, With control knob on clamping plate side										
With handle guide										
	20.222.0412.---	DIN left, outwards	8	high	Standard					
	20.222.0422.---	DIN right, outwards	8	high	Standard					
	20.223.0412.---	DIN left, outwards	8	flat	Standard	159,07	190,88	365,19	214,35	243,45
	20.223.0422.---	DIN right, outwards	8	flat	Standard					
With handle guide, lockable, no projection										
	20.222.5412.---	DIN left, outwards	8	high	Standard					
	20.222.5422.---	DIN right, outwards	8	high	Standard	172,40	204,22	378,51	227,69	256,77
	20.223.5412.---	DIN left, outwards	8	flat	Standard					
	20.223.5422.---	DIN right, outwards	8	flat	Standard					
	20.222.6412.---	DIN left, outwards	8	high	Magnet					
	20.222.6422.---	DIN right, outwards	8	high	Magnet	199,08	230,89	405,18	254,35	283,46
	20.223.6412.---	DIN left, outwards	8	flat	Magnet					
	20.223.6422.---	DIN right, outwards	8	flat	Magnet					
For door handles with roses										
	20.287.0412.---	DIN left, outwards	8	flat	Standard					
	20.287.0422.---	DIN right, outwards	8	flat	Standard	185,73	217,55	391,85	241,00	270,11
For door handles with roses, lockable, no projection										
	20.287.5412.---	DIN left, outwards	8	flat	Standard					
	20.287.5422.---	DIN right, outwards	8	flat	Standard	199,08	230,89	405,18	254,35	283,46
	20.287.6412.---	DIN left, outwards	8	flat	Magnet					
	20.287.6422.---	DIN right, outwards	8	flat	Magnet	225,74	257,55	431,84	281,03	310,12
GK striker box, large										
	20.254.0500.---		8 (10)	high						
	20.255.0500.---		8 (10)	flat		110,39	132,49	297,80	151,08	198,54
GK Striker box, small										
	20.257.0500.---		8 (10)	flat		110,39	132,49	297,80	151,08	198,54

¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.

STUDIO hinges for residential homes

					Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199 S
					Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Frame rebate depth	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
Hinge with sleeve									
	20.300.0500.---		8 (10)	24 (26)mm	33,34	42,67	100,02	54,67	54,67
Hinge with sleeve up to 45 mm frame rebate depth									
	20.302.0401.---		8	40mm	46,68	56,00	140,03	68,02	68,02
	20.304.0402.---		8	26-45mm	66,67	76,00	200,02	88,01	88,01
	20.306.0901.---		10	40mm	46,68	56,00	140,03	68,02	68,02
	20.308.0902.---		10	26-45mm	66,67	76,00	200,02	88,01	88,01
Hinge, With frame parts for steel frames, Can be screwed into place, Suitable for door weights up to 35 kg									
	20.312.0500.---		8 (10)		50,17	73,65	150,53	86,06	86,06
Hinge, glass-glass, Hinge for installation on glass side parts, Opening angle: max. 100 degree, Suitable for door weights up to 35 kg									
	20.318.0500.---		8 (10)		93,23	117,71	279,66	142,41	142,41

²Please specify the exact frame rebate depth.

OBJEKT hinges for commercial properties

OBJEKT hinges for commercial properties					Al E4/C-0 silver anod. ---.112 Al RAL 9010 powder coat. ---.250	Al E4/C-31 stainl. steel anod.. ---.137 Al RAL 9005 powder coat. 30% gloss level matt ---.285	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199 S Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Frame rebate depth	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
Hinge with sleeve									
	21.300.0500.---		8 (10)	24 (26)mm	33,34	42,67	100,02	54,67	54,67
Hinge with sleeve up to 45 mm frame rebate depth									
	21.302.0401.---		8	40mm	46,68	56,00	140,03	68,02	68,02
	21.304.0402.---		8	26-45mm	66,67	76,00	200,02	88,01	88,01
	21.306.0901.---		10	40mm	46,68	56,00	140,03	68,02	68,02
	21.308.0902.---		10	26-45mm	66,67	76,00	200,02	88,01	88,01
Hinge with ball bearing and sleeve									
	21.310.0510.---	DIN left	8 (10)	24 (26)mm	40,07	49,39	106,73	61,40	61,40
	21.310.0520.---	DIN right	8 (10)	24 (26)mm					
Hinge with fixing plate, For non-rebated door frames, Door weight: max. 50 kg for 500,000 closing cycles, max. 65 kg for 200,000 closing cycles									
	21.320.0500.---		8-10		55,29	73,83	165,88	90,50	90,50

²Please specify the exact frame rebate depth.

³Suitable for door weights up to 50kg for max. 500.000 closing cycles,
Suitable for door weights up to 65kg for max. 200.000 closing cycles

STUDIO ALEA

Creative ideas.

Elegant and timeless.

The hardware can be ordered as sets **or** individual components.


Sets (lock **with** hinges) Page 19–21

Individual components (lock **or** hinges) Page 22–27


Technical data:

Glass:	8 and 10mm toughened safety glass (12 mm on request) 8,76 and 10,76mm laminated safety glass of 2x toughened safety glass
Door weight:	max. 47 kg (hinges for private sector) max. 60 kg (hinges for commercial properties)
Door width:	max. 1.000mm
Frame rebate depth: ..	24 to 45 mm possible
Lock:	analogous DIN EN 12209 tested with 1,5 million closing cycles (specification: 500.000 closing cycles)
Corrosion protection: ..	analogous DIN EN 1670 / Class 3
Deadbolt projection: ..	20mm (1-turn)
Hinge:	analogous DIN EN 1935 tested with 200.000 closing cycles (private sector) and 500,000 closing cycles (commercial property)
Use:	Installation in frames according to DIN 18101/18111

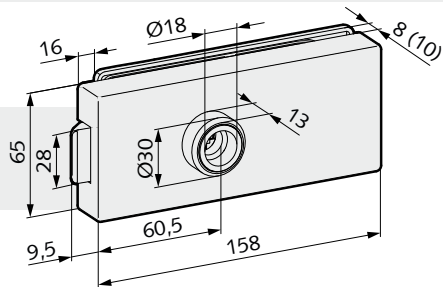UV lock
Handle position
front



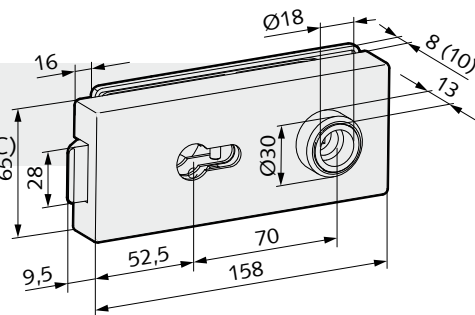PC lock
prepared for
profile cylinder (PC)



Total thickness: Lock with high clamping plate 45 (47) mm


Lock with flat clamping plate 40 (42) mm




Features:

- Locks for use in residential homes and commercial properties
- Hinges optionally for residential homes or commercial properties
- Lock and hinge in a square design
- Lock with standard and noise-reducing latch
- Lock can be used on the left/right
- Lock optionally with high or flat clamping plate
- Lock optionally with magnetic latch too
- Lock optionally as lockable, no projection
- Lock with low-wear springs
- Optimum hold for the square spindle thanks to the clamp follower
- Progressive adjustment of the door handle resistance
- For standard handles with 18mm shoulder guide, optionally also with handle roses
- With 10mm toughened safety glass and 24mm frame rebate depth, the latch head can be supplied machined (surcharge 20,13 €/piece gross)


Hinge with sleeve
for 24 mm frame rebate depth
(residential homes)



Hinge with sleeve
for 24 mm frame rebate depth
(commercial properties)



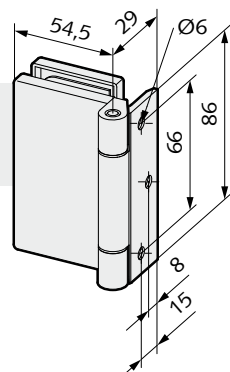Hinge with fixing plate
for non-rebated door frames
(commercial properties)



Sets


Sets						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
						Al RAL 9005 powder coat. 30% gloss level matt ---.285				
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		
STUDIO locks with STUDIO hinges										

Scope of delivery:

- 1 lock with handle guide of your choice
- 2 STUDIO hinges with sleeves




UV lock, Handle positioned on the reverse side




20.500.0500.---	8 (10)	high	Standard	147,67	177,19	213,50
20.501.0500.---	8 (10)	flat	Standard			

UV lock, Handle positioned at front




20.502.0500.---	8 (10)	high	Standard	147,67	177,19	213,50
20.503.0500.---	8 (10)	flat	Standard			

BB lock




20.504.0500.---	8 (10)	high	Standard	147,67	177,19	213,50
20.505.0500.---	8 (10)	flat	Standard			

PC lock




20.506.0500.---	8 (10)	high	Standard	147,67	177,19	213,50
20.507.0500.---	8 (10)	flat	Standard			

WC lock, With control knob on lock side




20.512.0411.---	DIN left, inwards	8	high	Standard	198,03	237,64	276,77
20.512.0421.---	DIN right, inwards	8	high	Standard			
20.513.0411.---	DIN left, inwards	8	flat	Standard			
20.513.0421.---	DIN right, inwards	8	flat	Standard			

WC lock, With control knob on clamping plate side



20.514.0412.---	DIN left, outwards	8	high	Standard	198,03	237,64	276,77
20.514.0422.---	DIN right, outwards	8	high	Standard			
20.515.0412.---	DIN left, outwards	8	flat	Standard			
20.515.0422.---	DIN right, outwards	8	flat	Standard			

GK striker box, large



20.546.0500.---	8 (10)	high		156,33	187,60	224,89
20.547.0500.---	8 (10)	flat				

GK striker box, small



20.549.0500.---	8 (10)	flat		156,33	187,60	224,89
-----------------	--------	------	--	--------	--------	--------

¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.

Sets

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
							Al RAL 9005 powder coat. 30% gloss level matt ---.285			
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		


STUDIO locks with OBJEKT hinges

Scope of delivery:

- 1 lock with handle guide of your choice
- 2 OBJEKT hinges with sleeves



UV lock, Handle positioned on the reverse side



20.500.1500.---

8 (10)

high

Standard

155,67

185,20

221,50


20.501.1500.---

8 (10)

flat

Standard

UV lock, Handle positioned at front



20.502.1500.---

8 (10)

high

Standard

155,67

185,20

221,50

20.503.1500.---

8 (10)

flat

Standard

BB lock



20.504.1500.---

8 (10)

high

Standard

155,67

185,20

221,50


20.505.1500.---

8 (10)

flat

Standard

PC lock



20.506.1500.---

8 (10)

high

Standard

155,67

185,20

221,50


20.507.1500.---

8 (10)

flat

Standard

WC lock, With control knob on lock side



20.512.1411.---

DIN left, inwards

8

high

Standard

20.512.1421.---

DIN right, inwards

8

high

Standard

20.513.1411.---

DIN left, inwards

8

flat

Standard

20.513.1421.---

DIN right, inwards

8

flat


Standard

206,01

245,63

284,79

WC lock, With control knob on clamping plate side



20.514.1412.---

DIN left, outwards

8

high

Standard

20.514.1422.---

DIN right, outwards

8

high

Standard

20.515.1412.---

DIN left, outwards

8

flat

Standard

20.515.1422.---

DIN right, outwards

8

flat


Standard

206,01

245,63

284,79

GK striker box, large



20.546.1500.---

8 (10)

high

164,35

195,61

232,90

20.547.1500.---

8 (10)

flat

GK striker box, small



20.549.1500.---

8 (10)

flat

164,35

195,61

232,90

¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.

Sets


						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
							Al RAL 9005 powder coat. 30% gloss level matt ---.285			
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		
STUDIO locks with OBJEKT hinges with fixing plate										

Scope of delivery:

- 1 lock with handle guide of your choice
- 2 OBJEKT hinges with fixing plate



UV lock, Handle positioned on the reverse side



20.500.2500.---

8 (10)

high

Standard

191,66

221,21

257,51




20.501.2500.---

8 (10)

flat

Standard

UV lock, Handle positioned at front



20.502.2500.---

8 (10)

high

Standard

191,66

221,21

257,51



20.503.2500.---

8 (10)

flat

Standard

BB lock



20.504.2500.---

8 (10)

high

Standard

191,66

221,21

257,51




20.505.2500.---

8 (10)

flat

Standard

PC lock



20.506.2500.---

8 (10)

high

Standard

191,66

221,21

257,51




20.507.2500.---

8 (10)

flat

Standard

WC lock, With control knob on lock side



20.512.2411.---

DIN left, inwards

8

high

Standard

20.512.2421.---

DIN right, inwards

8

high

Standard

20.513.2411.---

DIN left, inwards

8

flat

Standard

20.513.2421.---

DIN right, inwards

8

flat


Standard

242,02

281,64

320,78

WC lock, With control knob on clamping plate side



20.514.2412.---

DIN left, outwards

8

high

Standard

20.514.2422.---

DIN right, outwards

8

high

Standard

20.515.2412.---

DIN left, outwards

8

flat

Standard

20.515.2422.---

DIN right, outwards

8

flat


Standard

242,02

281,64

320,78

GK striker box, large



20.546.2500.---

8 (10)

high

200,34

231,62

268,90



20.547.2500.---

8 (10)

flat

GK striker box, small



20.549.2500.---

8 (10)

flat









200,34

231,62







268,90

¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.





Locks

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
UV lock, Handle positioned on the reverse side										
With handle guide										
	20.600.0500.---		8 (10)	high	Standard	102,92	123,50	277,35	143,40	184,89
	20.601.0500.---		8 (10)	flat	Standard					
	20.600.6500.---		8 (10)	high	Magnet	142,92	163,51	317,36	183,41	224,90
	20.601.6500.---		8 (10)	flat	Magnet					
For door handles with roses										
	20.625.0500.---		8 (10)	flat	Standard	129,59	150,19	304,01	170,08	211,57
	20.625.6500.---		8 (10)	flat	Magnet	169,60	190,18	344,03	210,07	251,57
UV lock, Handle positioned at front										
With handle guide										
	20.602.0500.---		8 (10)	high	Standard	102,92	123,50	277,35	143,40	184,89
	20.603.0500.---		8 (10)	flat	Standard					
	20.602.6500.---		8 (10)	high	Magnet	142,92	163,51	317,36	183,41	224,90
	20.603.6500.---		8 (10)	flat	Magnet					
For door handles with roses										
	20.627.0500.---		8 (10)	flat	Standard	129,59	150,19	304,01	170,08	211,57
	20.627.6500.---		8 (10)	flat	Magnet	169,60	190,18	344,03	210,07	251,57
BB lock										
With handle guide										
	20.604.0500.---		8 (10)	high	Standard	102,92	123,50	277,35	143,40	184,89
	20.605.0500.---		8 (10)	flat	Standard					
With handle guide, lockable, no projection										
	20.604.5500.---		8 (10)	high	Standard	116,27	136,85	290,69	156,74	198,23
	20.605.5500.---		8 (10)	flat	Standard					
	20.604.6500.---		8 (10)	high	Magnet	142,92	163,51	317,36	183,41	224,90
	20.605.6500.---		8 (10)	flat	Magnet					
For door handles with roses										
	20.635.0500.---		8 (10)	flat	Standard	129,59	150,19	304,01	170,08	211,57
For door handles with roses, lockable, no projection										
	20.635.5500.---		8 (10)	flat	Standard	142,92	163,51	317,36	183,41	224,90
	20.635.6500.---		8 (10)	flat	Magnet	169,60	190,18	344,03	210,07	251,57

Locks






Locks						Al E4/C-0 silver anod. ---.112 Al RAL 9010 powder coat. ---.250	Al E4/C-31 stainl. steel anod.. ---.137 Al RAL 9005 powder coat. 30% gloss level matt ---.285	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199 S Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
PC lock										
With handle guide										
	20.606.0500.---		8 (10)	high	Standard	102,92	123,50	277,35	143,40	184,89
	20.607.0500.---		8 (10)	flat	Standard					
With handle guide, lockable, no projection										
	20.606.5500.---		8 (10)	high	Standard	116,27	136,85	290,69	156,74	198,23
	20.607.5500.---		8 (10)	flat	Standard					
	20.606.6500.---		8 (10)	high	Magnet					
	20.607.6500.---		8 (10)	flat	Magnet					
For door handles with roses										
	20.645.0500.---		8 (10)	flat	Standard	129,59	150,19	304,01	170,08	211,57
For door handles with roses, lockable, no projection										
	20.645.5500.---		8 (10)	flat	Standard	142,92	163,51	317,36	183,41	224,90
	20.645.6500.---		8 (10)	flat	Magnet					
PC lock with PC rose										
With handle guide										
	20.610.0500.---		8 (10)	high	Standard	137,96	165,56	329,95	178,46	219,95
With handle guide, lockable, no projection										
	20.610.5500.---		8 (10)	high	Standard	151,30	178,90	343,29	191,78	233,30
	20.610.6500.---		8 (10)	high	Magnet					

Locks

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
WC lock, With control knob on lock side										
With handle guide										
	20.620.0411.---	DIN left, inwards	8	high	Standard					
	20.620.0421.---	DIN right, inwards	8	high	Standard					
	20.621.0411.---	DIN left, inwards	8	flat	Standard	159,07	190,88	365,19	214,35	243,45
	20.621.0421.---	DIN right, inwards	8	flat	Standard					
With handle guide, lockable, no projection										
	20.620.5411.---	DIN left, inwards	8	high	Standard					
	20.620.5421.---	DIN right, inwards	8	high	Standard	172,40	204,22	378,51	227,69	256,77
	20.621.5411.---	DIN left, inwards	8	flat	Standard					
	20.621.5421.---	DIN right, inwards	8	flat	Standard					
	20.620.6411.---	DIN left, inwards	8	high	Magnet					
	20.620.6421.---	DIN right, inwards	8	high	Magnet	199,08	230,89	405,18	254,35	283,46
	20.621.6411.---	DIN left, inwards	8	flat	Magnet					
	20.621.6421.---	DIN right, inwards	8	flat	Magnet					
For door handles with roses										
	20.677.0411.---	DIN left, inwards	8	flat	Standard					
	20.677.0421.---	DIN right, inwards	8	flat	Standard	185,73	217,55	391,85	241,00	270,11
For door handles with roses, lockable, no projection										
	20.677.5411.---	DIN left, inwards	8	flat	Standard					
	20.677.5421.---	DIN right, inwards	8	flat	Standard	199,08	230,89	405,18	254,35	283,46
	20.677.6411.---	DIN left, inwards	8	flat	Magnet	225,74	257,55	431,84	281,03	310,12
	20.677.6421.---	DIN right, inwards	8	flat	Magnet					




¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.

Locks

Locks						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199 S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
WC lock, With control knob on clamping plate side										
With handle guide										
	20.622.0412.---	DIN left, outwards	8	high	Standard					
	20.622.0422.---	DIN right, outwards	8	high	Standard					
	20.623.0412.---	DIN left, outwards	8	flat	Standard	159,07	190,88	365,19	214,35	243,45
	20.623.0422.---	DIN right, outwards	8	flat	Standard					
With handle guide, lockable, no projection										
	20.622.5412.---	DIN left, outwards	8	high	Standard					
	20.622.5422.---	DIN right, outwards	8	high	Standard					
	20.623.5412.---	DIN left, outwards	8	flat	Standard	172,40	204,22	378,51	227,69	256,77
	20.623.5422.---	DIN right, outwards	8	flat	Standard					
	20.622.6412.---	DIN left, outwards	8	high	Magnet					
	20.622.6422.---	DIN right, outwards	8	high	Magnet					
	20.623.6412.---	DIN left, outwards	8	flat	Magnet	199,08	230,89	405,18	254,35	283,46
	20.623.6422.---	DIN right, outwards	8	flat	Magnet					
For door handles with roses										
	20.687.0412.---	DIN left, outwards	8	flat	Standard					
	20.687.0422.---	DIN right, outwards	8	flat	Standard	185,73	217,55	391,85	241,00	270,11
For door handles with roses, lockable, no projection										
	20.687.5412.---	DIN left, outwards	8	flat	Standard					
	20.687.5422.---	DIN right, outwards	8	flat	Standard	199,08	230,89	405,18	254,35	283,46
	20.687.6412.---	DIN left, outwards	8	flat	Magnet					
	20.687.6422.---	DIN right, outwards	8	flat	Magnet	225,74	257,55	431,84	281,03	310,12
GK striker box, large										
	20.654.0500.---		8 (10)	high						
	20.655.0500.---		8 (10)	flat		110,39	132,49	297,80	151,08	198,54
GK Striker box, small										
	20.257.0500.---		8 (10)	flat		110,39	132,49	297,80	151,08	198,54

¹For a definition of the DIN and opening direction of WC locks with a control knob, please refer to page 7.

STUDIO hinges for residential homes

					Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199S
					Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Frame rebate depth	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
Hinge with sleeve									
	20.700.0500.---		8 (10)	24 (26)mm	33,34	42,67	100,02	54,67	54,67
Hinge with sleeve up to 45 mm frame rebate depth									
	20.702.0401.---		8	40mm	46,68	56,00	140,03	68,02	68,02
	20.704.0402.---		8	26-45mm	66,67	76,00	200,02	88,01	88,01
	20.706.0901.---		10	40mm	46,68	56,00	140,03	68,02	68,02
	20.708.0902.---		10	26-45mm	66,67	76,00	200,02	88,01	88,01
Hinge, With frame parts for steel frames, Can be screwed into place, Suitable for door weights up to 35 kg									
	20.712.0500.---		8 (10)		50,17	73,65	150,53	86,06	86,06
Hinge, glass-glass, Hinge for installation on glass side parts, Opening angle: max. 100 degree, Suitable for door weights up to 35 kg									
	20.718.0500.---		8 (10)		93,23	117,71	279,66	142,41	142,41

²Please specify the exact frame rebate depth.

OBJEKT hinges for commercial properties

OBJEKT hinges for commercial properties					Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199 S
					Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Frame rebate depth	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
Hinge with sleeve									
	21.900.0500.---		8 (10)	24 (26) mm	33,34	42,67	100,02	54,67	54,67
Hinge with sleeve up to 45 mm frame rebate depth									
	21.902.0401.---		8	40 mm	46,68	56,00	140,03	68,02	68,02
	21.904.0402.---		8	26-45 mm	66,67	76,00	200,02	88,01	88,01
	21.906.0901.---		10	40 mm	46,68	56,00	140,03	68,02	68,02
	21.908.0902.---		10	26-45 mm	66,67	76,00	200,02	88,01	88,01
Hinge with ball bearing and sleeve									
	21.910.0510.---	DIN left	8 (10)	24 (26) mm	40,07	49,39	106,73	61,40	61,40
	21.910.0520.---	DIN right	8 (10)	24 (26) mm					
Hinge with fixing plate, for non-rebated door frames, Door weight: max. 50 kg for 500.000 closing cycles, max. 65 kg for 200.000 closing cycles									
	21.920.0500.---		8-10		55,29	73,83	165,88	90,50	90,50

²Please specify the exact frame rebate depth.

³Suitable for door weights up to 50kg for max. 500.000 closing cycles,
Suitable for door weights up to 65kg for max. 200.000 closing cycles

STUDIO VENA

Make your mark.

Innovative and elegant design.

The hardware can be ordered as sets **or** individual components.

Sets (lock **with** hinges) Page 29–31

Individual components (lock **or** hinges) Page 32–33

Technical data:

Glass:	8 and 10mm toughened safety glass (12 mm on request) 8,76 and 10,76 mm laminated safety glass of 2x toughened safety glass
Door weight:	max. 47 kg (hinges for private sector) max. 60 kg (hinges for commercial properties)
Door width:	max. 1.000 mm
Frame rebate depth: ..	24 to 45 mm possible
Lock:	analogous DIN EN 12209 tested with 1,5 million closing cycles (specification: 500.000 closing cycles)
Corrosion protection: ..	analogous DIN EN 1670 / Class 3
Deadbolt projection: ..	20mm (1-turn)
Hinge:	analogous DIN EN 1935 tested with 200.000 closing cycles (private sector) and 500.000 closing cycles (commercial property)
Use:	Installation in frames according to DIN 18101/18111

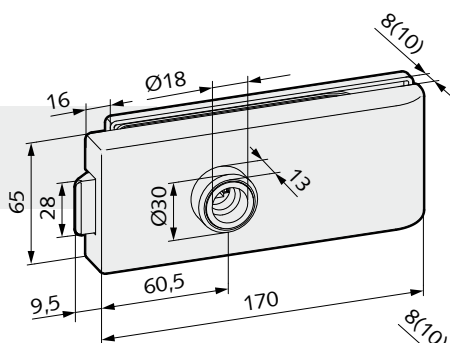


Features:

- Locks for use in residential homes and commercial properties
- Hinges optionally for residential homes or commercial properties
- Lock and hinge in an exclusive design
- Lock with standard and noise-reducing latch
- Lock can be used on the left/right
- Lock with flat clamping plate
- Lock optionally with magnetic latch too
- Lock optionally as lockable, no projection
- Lock with low-wear springs
- Optimum hold for the square spindle thanks to the clamp follower
- Progressive adjustment of the door handle resistance
- For standard handles with 18mm shoulder guide
- With 10mm toughened safety glass and 24mm frame rebate depth, the latch head can be supplied machined (surcharge 20,13 €/piece gross)


UV lock

Handle position
front



PC lock

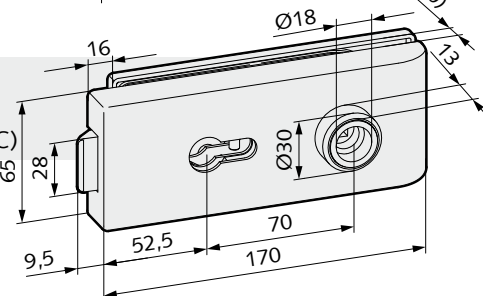
prepared for
profile cylinder (PC)



Total thickness: Lock with flat clamping plate 40 (42) mm


Hinge with sleeve

for 24 mm frame rebate depth
(residential homes)




Hinge with sleeve

for 24 mm frame rebate depth
(commercial properties)



Hinge with fixing plate

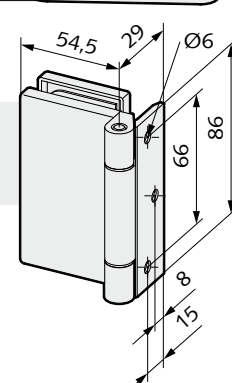for non-rebated door frames
(commercial properties)



Sets

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
							Al RAL 9005 powder coat. 30% gloss level matt ---.285			
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		
STUDIO locks with STUDIO hinges										

Scope of delivery:

- 1 lock with handle guide of your choice
- 2 STUDIO hinges with sleeves



UV lock, Handle positioned on the reverse side



20.801.0500.--- 8 (10) flat Standard 147,67 177,19 213,50

UV lock, Handle positioned at front



20.803.0500.--- 8 (10) flat Standard 147,67 177,19 213,50

BB lock



20.805.0500.--- 8 (10) flat Standard 147,67 177,19 213,50

PC lock



20.807.0500.--- 8 (10) flat Standard 147,67 177,19 213,50

GK striker box, small



20.809.0500.--- 8 (10) flat 156,33 187,60 224,89


Sets

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
							Al RAL 9005 powder coat. 30% gloss level matt ---.285			
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		
STUDIO locks with OBJEKT hinges										

- Scope of delivery:
- 1 lock with handle guide of your choice
 - 2 OBJEKT hinges with sleeves




UV lock, Handle positioned on the reverse side



20.801.1500.---	8 (10)	flat	Standard	155,67	185,20	221,50
-----------------	--------	------	----------	--------	--------	--------

UV lock, Handle positioned at front




20.803.1500.---	8 (10)	flat	Standard	155,67	185,20	221,50
-----------------	--------	------	----------	--------	--------	--------

BB lock



20.805.1500.---	8 (10)	flat	Standard	155,67	185,20	221,50
-----------------	--------	------	----------	--------	--------	--------

PC lock



20.807.1500.---	8 (10)	flat	Standard	155,67	185,20	221,50
-----------------	--------	------	----------	--------	--------	--------

GK striker box, small



20.809.1500.---	8 (10)	flat		164,35	195,61	232,90
-----------------	--------	------	--	--------	--------	--------

Sets

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al stainless steel finish ---.198		
							Al RAL 9005 powder coat. 30% gloss level matt ---.285			
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.		
STUDIO locks with OBJEKT hinges with fixing plate										

Scope of delivery:

- 1 lock with handle guide of your choice
- 2 OBJEKT hinges with fixing plate



UV lock, Handle positioned on the reverse side



20.801.2500.--- 8 (10) flat Standard 191,66 221,21 257,51

UV lock, Handle positioned at front



20.803.2500.--- 8 (10) flat Standard 191,66 221,21 257,51

BB lock



20.805.2500.--- 8 (10) flat Standard 191,66 221,21 257,51

PC lock







20.807.2500.--- 8 (10) flat Standard 191,66 221,21 257,51

GK striker box, small




20.809.2500.--- 8 (10) flat 200,34 231,62 268,90

Locks

Locks						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199 S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Clamping plate	Latch	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
UV lock, Handle positioned on the reverse side										
With handle guide										
	20.841.0500.---		8 (10)	flat	Standard	102,92	123,50	277,35	143,40	184,89
	20.841.6500.---		8 (10)	flat	Magnet	142,92	163,51	317,36	183,41	224,90
UV lock, Handle positioned at front										
With handle guide										
	20.843.0500.---		8 (10)	flat	Standard	102,92	123,50	277,35	143,40	184,89
	20.843.6500.---		8 (10)	flat	Magnet	142,92	163,51	317,36	183,41	224,90
BB lock										
With handle guide										
	20.845.0500.---		8 (10)	flat	Standard	102,92	123,50	277,35	143,40	184,89
With handle guide, lockable, no projection										
	20.845.5500.---		8 (10)	flat	Standard	116,27	136,85	290,69	156,74	198,23
	20.845.6500.---		8 (10)	flat	Magnet	142,92	163,51	317,36	183,41	224,90
PC lock										
With handle guide										
	20.847.0500.---		8 (10)	flat	Standard	102,92	123,50	277,35	143,40	184,89
With handle guide, lockable, no projection										
	20.847.5500.---		8 (10)	flat	Standard	116,27	136,85	290,69	156,74	198,23
	20.847.6500.---		8 (10)	flat	Magnet	142,92	163,51	317,36	183,41	224,90
GK striker box, small										
	20.849.0500.---		8 (10)	flat		110,39	132,49	297,80	151,08	198,54


STUDIO hinges for residential homes

STUDIO hinges for residential homes					Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199S
					Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	DIN	Glass	Frame rebate depth	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
Hinge with sleeve									



20.700.0500.---			8 (10)	24 (26)mm	33,34	42,67	100,02	54,67	54,67
-----------------	--	--	--------	-----------	-------	-------	--------	-------	-------

Hinge with sleeve up to 45 mm frame rebate depth




20.702.0401.---			8	40mm	46,68	56,00	140,03	68,02	68,02
20.704.0402.---			8	26-45mm	66,67	76,00	200,02	88,01	88,01
20.706.0901.---			10	40mm	46,68	56,00	140,03	68,02	68,02
20.708.0902.---			10	26-45mm	66,67	76,00	200,02	88,01	88,01

Hinge, With frame parts for steel frames, Can be screwed into place, Suitable for door weights up to 35 kg



20.712.0500.---			8 (10)		50,17	73,65	150,53	86,06	86,06
-----------------	--	--	--------	--	-------	-------	--------	-------	-------

Hinge, glass-glass, Hinge for installation on glass side parts, Opening angle: max. 100 degree, Suitable for door weights up to 35 kg



20.718.0500.---			8 (10)		93,23	117,71	279,66	142,41	142,41
-----------------	--	--	--------	--	-------	--------	--------	--------	--------

OBJEKT hinges for commercial properties

Hinge with sleeve



20.880.0500.---			8 (10)	24 (26)mm	33,34	42,67	100,02	54,67	54,67
-----------------	--	--	--------	-----------	-------	-------	--------	-------	-------

Hinge with sleeve up to 45 mm frame rebate depth



20.882.0401.---			8	40mm	46,68	56,00	140,03	68,02	68,02
20.884.0402.---			8	26-45mm	66,67	76,00	200,02	88,01	88,01
20.886.0901.---			10	40mm	46,68	56,00	140,03	68,02	68,02
20.888.0902.---			10	26-45mm	66,67	76,00	200,02	88,01	88,01

Hinge with ball bearing and sleeve



20.890.0510.---	DIN left		8 (10)	24 (26)mm					
20.890.0520.---	DIN right		8 (10)	24 (26)mm	40,07	49,39	106,73	61,40	61,40

Hinge with fixing plate, for non-rebated door frames, Door weight: max. 50kg for 500.000 closing cycles, max. 65kg for 200.000 closing cycles



21.920.0500.---			8-10		55,29	73,83	165,88	90,50	90,50
-----------------	--	--	------	--	-------	-------	--------	-------	-------

²Please specify the exact frame rebate depth.


³Suitable for door weights up to 50kg for max. 500.000 closing cycles,
Suitable for door weights up to 65kg for max. 200.000 closing cycles

Accessories

Extensive choice of accessories – various options, more comfort.




Handles




Many possibilities with various shapes. Further models have been added to the extensive product range. Handle and lock – the perfect combination.

Door seals




More comfort through the use of door seals. The function of the "SCHALL-EX®" door seals. The seal profile is raised and lowered when the door opens and closes and protects against noise, cold and draughts.

Handle and knob with no function



Exchangeable hardware with handle and free-turning knob (no function) can be used for locks with no shoulder guide.


Door closers




Door closers close doors safely and automatically and are suitable for single action doors up to a max. leaf width of 1.100mm. The door closers have an infinitely variable retainer from 80° to 130° and an infinitely variable closing force according to DIN EN 1154.

Frame parts

You will find a solution for every application. Frame parts for use in residential homes and commercial properties. The tested and practically proven load values are summarised in a neat table.







Corner hinges



The corner hinges with screw-on top and bottom pivots are suitable for glass doors between 8–12 mm thick and up to a max. door weight of 80kg. The corner hinges can be used on the left or right.




Handles

Handles						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al in special colour anod. ---.199 S	304 matt brushed ---.426	304 polished ---.416
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285	Al RAL powder coat ---.295		
Fig./Description	Art.-N°				Class ¹	€/Set.	€/Set.	€/Set.	€/Set.	€/Set.
Handle, round shape										
with handle guide										
	22.100.0000.---				3	44,00	51,57	80,83	51,57	160,09
With handle roses										
	22.200.0000.---				3	78,61	96,59	150,12	86,22	218,27
Handle, flat oval shape										
with handle guide										
	22.104.0000.---				3	22,98	31,65	38,63		
With handle roses										
	22.204.0000.---				3	57,62	76,68	107,91		
Handle, mitred shape										
with handle guide										
	22.108.0000.---				3	44,00	51,57	80,83	51,57	160,09
With handle roses										
	22.208.0000.---				3	78,61	96,59	150,12	86,22	218,27
Handle, Design Line										
with handle guide										
	22.128.0000.---				3	44,00	51,57	80,83		
With handle roses										
	22.228.0000.---				3	78,61	96,59	150,12		
Handle, bent shape										
with handle guide										
	22.130.0000.426				3				44,09	
With handle roses										
	22.230.0000.426				3				58,29	
Handle, square shape										
with handle guide										
	22.134.0000.426				3				87,15	
With handle roses										
	22.234.0000.426				3				101,34	

The handles in Stainless Steel 304 matt brushed (---.426) and Stainless Steel 304 polished (---.416) can be combined with the locks in Al stainless steel finish (---.198) and Al polished chrome (---.174) .

⁴Corrosion protection class analogue DIN EN 1670

Handles

						Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al in special colour anod. ---.199 S	304 matt brushed ---.426	304 polished ---.416
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285	Al RAL powder coat ---.295		
Fig./Description	Art.-N°				Class ¹	€/Set.	€/Set.	€/Set.	€/Set.	€/Set.
Handle, rod shape										
with handle guide										
	22.138.0000.426				3				44,09	
With handle roses										
	22.238.0000.426				3				58,29	
Handle, angular shape										
with handle guide										
	22.142.0000.426				3				64,00	
With handle roses										
	22.242.0000.426				3				78,20	
Turning knob										
with handle guide										
	22.150.0000.---				3	53,43	62,61	80,83		
With handle roses										
	22.250.0000.---				3	79,97	96,63	120,61		
Handle, round shape and knob with no function										
with handle guide										
	22.154.0000.---				3	102,70	111,73	143,52	149,20	
Handle, flat oval shape and knob with no function										
with handle guide										
	22.156.0000.---				3	92,15	106,20	133,49		
Handle, mitred shape and knob with no function										
with handle guide										
	22.158.0000.---				3	102,70	111,73	143,52	149,20	
Handle, round shape and fixed knob										
With handle roses										
	22.254.0000.---				3	76,02	85,05	116,84	122,54	
Handle, flat oval shape and fixed knob										
With handle roses										
	22.256.0000.---				3	65,49	79,53	106,83		
Handle, mitred shape and fixed knob										
With handle roses										
	22.258.0000.---				3	76,02	85,05	116,84	122,54	

The handles in Stainless Steel 304 matt brushed (---.426) and Stainless Steel 304 polished (---.416) can be combined with the locks in Al stainless steel finish (---.198) and Al polished chrome (---.174) .

⁴Corrosion protection class analogue DIN EN 1670

Frame parts for STUDIO hinges

					St galvanized ---.010				
Fig./Description	Art.-N°			Class ⁴	€/pc.				
Frame part for wooden frames, For fixing plate V 3614									
	20.902.0000.010			0	13,43				
Frame part for wooden, steel and aluminium frames, For screwing on									
	20.904.0000.010			0	26,92				
Bolts, To convert frame parts									
	20.912.0000.010			0	7,47				
Frame part for steel frames, For frame pocket V 8600									
	20.922.0000.010			0	11,57				
Frame part for steel frames, For screwing on, for frame pocket V 8600									
	20.924.0000.010			0	33,85				



⁴Corrosion protection class analogue DIN EN 1670

Frame parts for OBJEKT hinges

					St galvanized ---.010				
Fig./Description	Art.-N°			Class ⁴	€/pc.				
Frame part for wooden frames, For frame pocket V 3614									
	21.400.0000.010			0	5,96				
Frame part for wooden, steel and aluminium frames, For screwing on									
	21.402.0000.010			0	20,39				
Frame part for steel frames, For frame pocket V 8600									
	21.420.0000.010			0	4,09				
Frame part for steel frames, For screwing on, for frame pocket V 8600									
	21.422.0000.010			0	27,39				
Frame part for steel frames, For frame pocket VN 7608/120 3D									
	21.424.0000.010			0	19,40				
Frame part for steel frames, For frame pocket VN 7608/160 3D									
	21.426.0000.010			0	19,40				
Frame part for wooden, steel and aluminium frames, For frame pocket VX									
	21.440.0000.010			0	19,40				


⁴Corrosion protection class analogue DIN EN 1670

Door rails, door seals

Door rails, door seals					Al E4/C-0 silver anod. ---.112	Al E6/C-0 silver anod.. ---.114	Al E4/C-31 stainl. steel anod.. ---.137	AL E6/C-31 stainl. steel anod. ---.139	Al in special colour anod. ---.199 S	Plastic natural ---.505
					Al RAL 9010 powder coat. ---.250		Al RAL 9005 powder coat. 30% gloss level matt ---.285		Al RAL powder coat ---.295	
Fig./Description	Art.-N°	Glass	Leaf width	Class ⁴	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
Door rail										
	26.102.0400.---	8	834 mm	4	45,92		63,74		72,73	
	26.104.0400.---	8	959 mm	4	51,18		71,69		81,92	
	26.106.0400.---	8	auf Maß	4	58,27		76,82		96,24	
Door rail with automatic drop-down seal										
	26.132.0400.---	8	834 mm	0	168,65		207,12		232,21	
	26.134.0400.---	8	959 mm	0	177,48		215,97		241,03	
	26.136.0400.---	8	auf Maß	0	186,29		224,78		249,88	
Brush seal										
	26.162.0000.505		834 mm	0						19,09
	26.164.0000.505		959 mm	0						20,30
	26.166.0000.505		auf Maß	0						26,30
"SCHALL-EX®" door seal GS-8/GS-10										
	26.170.0400.---	8	834 mm	0		161,94		194,32		
	26.172.0400.---	8	959 mm	0		170,91		205,09		
	26.174.0400.---	8	1.084 mm	0		178,37		214,08		
	26.176.0900.---	10	834 mm	0		161,94		194,32		
	26.178.0900.---	10	959 mm	0		170,91		205,09		
	26.180.0900.---	10	1.084 mm	0		178,37		214,08		
"SCHALL-EX®" door seal GS-H8/GS-H10										
	26.182.0400.---	8	834 mm	0		157,10		188,51		
	26.184.0400.---	8	959 mm	0		165,46		198,56		
	26.186.0400.---	8	1.084 mm	0		173,00		207,62		
	26.188.0900.---	10	834 mm	0		157,10		188,51		
	26.190.0900.---	10	959 mm	0		165,46		198,56		
	26.192.0900.---	10	1.084 mm	0		173,00		207,62		
"SCHALL-EX®" door seal GS-A										
	26.194.0000.---	≥6	834 mm	0		161,94		194,32		
	26.196.0000.---	≥6	959 mm	0		170,91		205,09		
	26.198.0000.---	≥6	1.084 mm	0		178,37		214,08		



⁴Corrosion protection class analogue DIN EN 1670⁵Please specify the exact leaf width.

Door closer, door catches

Door closer, door catches				St silver lacquered ---.035	Al E6/C-0 silver anod.. ---.114	Plastic white ---.550		
Fig./Description	Art.-N°	Glass	Class ⁴	€/pc.	€/pc.	€/pc.		
GEZE TS 3000 V door closer with glass clamp shoe								
	26.700.0500.035	8-10	4	On request				
GEZE TS 3000 RF door closer with glass clamp shoe								
	26.702.0500.035	8-10	4	On request				
DORMA TS 92 door closer with glass door shoe								
	26.710.0500.035	8-10	3	On request				
DORMA TS 92 door RF closer with glass door shoe								
	26.712.0500.035	8-10	3	On request				
Door catch								
	26.200.0000.114		3		16,07			
Door catch with roller latch								
	26.201.0000.550		0			31,65		


⁴Corrosion protection class analogue DIN EN 1670

Accessories

					St galvanized ---.010	Al E4/C-0 silver anod. ---.112	Al E4/C-31 stainl. steel anod.. ---.137	Al polished chromet ---.174	Al stainless steel finish ---.198	Al in special colour anod. ---.199S
						Al RAL 9010 powder coat. ---.250	Al RAL 9005 powder coat. 30% gloss level matt ---.285			Al RAL powder coat ---.295
Fig./Description	Art.-N°	Glass		Class ⁴	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
Slide-over door bolt										
	26.202.0400.---	8		2		72,22	86,70	165,25	95,35	95,35
	26.202.0900.---	10		2		73,98	88,47	167,03	97,12	97,12
Slide-over striker box										
	26.204.0400.---	8		3		72,22	86,70	165,25	95,35	95,35
	26.204.0900.---	10		3		73,98	88,47	167,03	97,12	97,12
Floor bush with spring-loaded dust protector										
	26.206.0000.010			2		14,97				
Corner hinges										
	26.300.0600.---	8-12		2		87,77	116,19	200,25	133,48	133,48

⁴Corrosion protection class analogue DIN EN 1670

Accessories

					Al E4/C-0 silver anod. ---.112	Brass matt nickel plated ---.325	304 matt brushed ---.426	Plastic natural ---.505	Plastic black ---.565	Plastic grey ---.570	diverse ---.999
Fig./Description	Art.-N°	Glass	Keying	Class ⁴	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.	€/pc.
Wall bracket for corner hinges											
	26.301.0000.426			4			12,93				
Handle guide											
	26.310.0000.565			4					1,80		
Magnetic insert											
	26.320.0000.570			4						10,39	
Magnetic clip											
	26.330.0000.505	size 1		4				33,34			
	26.332.0000.505	size 2		4							
Floor-mounted retainer											
	26.400.0500.426	8-10		2			58,27				
Door stop											
	06.400.0000.---			2	29,13		37,03				
Striking plate											
	26.404.0000.426			4			7,08				
Profile cylinder											
	01.901.3131.325		different keys	3		25,83					
	01.903.3131.325		same keys	3		27,41					
Profile thumb cylinder											
	01.913.3131.325		different keys	3		69,06					
	01.914.3131.325		same keys	3		72,60					
Colour swatch											
	99.110.0000.999										95,35

⁴Corrosion protection class analogue DIN EN 1670

Index

Part#	Page	Part#	Page	Part#	Page	Part#	Page	Part#	Page
01.901.3131.325	42	20.147.0500.---	9	20.227.6500.---	12	20.512.1421.---	20	20.620.5421.---	24
01.903.3131.325	42	20.147.1500.---	10	20.235.0500.---	12	20.512.2411.---	21	20.620.6411.---	24
01.913.3131.325	42	20.147.2500.---	11	20.235.5500.---	12	20.512.2421.---	21	20.620.6421.---	24
01.914.3131.325	42	20.149.0500.---	9	20.235.6500.---	12	20.513.0411.---	19	20.621.0411.---	24
06.400.0000.---	42	20.149.1500.---	10	20.245.0500.---	13	20.513.0421.---	19	20.621.0421.---	24
20.100.0500.---	9	20.149.2500.---	11	20.245.5500.---	13	20.513.1411.---	20	20.621.5411.---	24
20.100.1500.---	10	20.200.0500.---	12	20.245.6500.---	13	20.513.1421.---	20	20.621.5421.---	24
20.100.2500.---	11	20.200.6500.---	12	20.254.0500.---	15	20.513.2411.---	21	20.621.6411.---	24
20.101.0500.---	9	20.201.0500.---	12	20.255.0500.---	15	20.513.2421.---	21	20.621.6421.---	24
20.101.1500.---	10	20.201.6500.---	12	20.257.0500.---	15, 25	20.514.0412.---	19	20.622.0412.---	25
20.101.2500.---	11	20.202.0500.---	12	20.277.0411.---	14	20.514.0422.---	19	20.622.0422.---	25
20.102.0500.---	9	20.202.6500.---	12	20.277.0421.---	14	20.514.1412.---	20	20.622.5412.---	25
20.102.1500.---	10	20.203.0500.---	12	20.277.5411.---	14	20.514.1422.---	20	20.622.5422.---	25
20.102.2500.---	11	20.203.6500.---	12	20.277.5421.---	14	20.514.2412.---	21	20.622.6412.---	25
20.103.0500.---	9	20.204.0500.---	12	20.277.6411.---	14	20.514.2422.---	21	20.622.6422.---	25
20.103.1500.---	10	20.204.5500.---	12	20.277.6421.---	14	20.515.0412.---	19	20.623.0412.---	25
20.103.2500.---	11	20.204.6500.---	12	20.287.0412.---	15	20.515.0422.---	19	20.623.0422.---	25
20.104.0500.---	9	20.205.0500.---	12	20.287.0422.---	15	20.515.1412.---	20	20.623.5412.---	25
20.104.1500.---	10	20.205.5500.---	12	20.287.5412.---	15	20.515.1422.---	20	20.623.5422.---	25
20.104.2500.---	11	20.205.6500.---	12	20.287.5422.---	15	20.515.2412.---	21	20.623.6412.---	25
20.105.0500.---	9	20.206.0500.---	13	20.287.6412.---	15	20.515.2422.---	21	20.623.6422.---	25
20.105.1500.---	10	20.206.5500.---	13	20.287.6422.---	15	20.546.0500.---	19	20.625.0500.---	22
20.105.2500.---	11	20.206.6500.---	13	20.300.0500.---	16	20.546.1500.---	20	20.625.6500.---	22
20.106.0500.---	9	20.207.0500.---	13	20.302.0401.---	16	20.546.2500.---	21	20.627.0500.---	22
20.106.1500.---	10	20.207.5500.---	13	20.304.0402.---	16	20.547.0500.---	19	20.627.6500.---	22
20.106.2500.---	11	20.207.6500.---	13	20.306.0901.---	16	20.547.1500.---	20	20.635.0500.---	22
20.107.0500.---	9	20.210.0500.---	13	20.308.0902.---	16	20.547.2500.---	21	20.635.5500.---	22
20.107.1500.---	10	20.210.5500.---	13	20.312.0500.---	16	20.549.0500.---	19	20.635.6500.---	22
20.107.2500.---	11	20.210.6500.---	13	20.318.0500.---	16	20.549.1500.---	20	20.645.0500.---	23
20.112.0411.---	9	20.220.0411.---	14	20.500.0500.---	19	20.549.2500.---	21	20.645.5500.---	23
20.112.0421.---	9	20.220.0421.---	14	20.500.1500.---	20	20.600.0500.---	22	20.645.6500.---	23
20.112.1411.---	10	20.220.5411.---	14	20.500.2500.---	21	20.600.6500.---	22	20.654.0500.---	25
20.112.1421.---	10	20.220.5421.---	14	20.501.0500.---	19	20.601.0500.---	22	20.655.0500.---	25
20.112.2411.---	11	20.220.6411.---	14	20.501.1500.---	20	20.601.6500.---	22	20.677.0411.---	24
20.112.2421.---	11	20.220.6421.---	14	20.501.2500.---	21	20.602.0500.---	22	20.677.0421.---	24
20.113.0411.---	9	20.221.0411.---	14	20.502.0500.---	19	20.602.6500.---	22	20.677.5411.---	24
20.113.0421.---	9	20.221.0421.---	14	20.502.1500.---	20	20.603.0500.---	22	20.677.5421.---	24
20.113.1411.---	10	20.221.5411.---	14	20.502.2500.---	21	20.603.6500.---	22	20.677.6411.---	24
20.113.1421.---	10	20.221.5421.---	14	20.503.0500.---	19	20.604.0500.---	22	20.677.6421.---	24
20.113.2411.---	11	20.221.6411.---	14	20.503.1500.---	20	20.604.5500.---	22	20.687.0412.---	25
20.113.2421.---	11	20.221.6421.---	14	20.503.2500.---	21	20.604.6500.---	22	20.687.0422.---	25
20.114.0412.---	9	20.222.0412.---	15	20.504.0500.---	19	20.605.0500.---	22	20.687.5412.---	25
20.114.0422.---	9	20.222.0422.---	15	20.504.1500.---	20	20.605.5500.---	22	20.687.5422.---	25
20.114.1412.---	10	20.222.5412.---	15	20.504.2500.---	21	20.605.6500.---	22	20.687.6412.---	25
20.114.1422.---	10	20.222.5422.---	15	20.505.0500.---	19	20.606.0500.---	23	20.687.6422.---	25
20.114.2412.---	11	20.222.6412.---	15	20.505.1500.---	20	20.606.5500.---	23	20.700.0500.---	26, 33
20.114.2422.---	11	20.222.6422.---	15	20.505.2500.---	21	20.606.6500.---	23	20.702.0401.---	26, 33
20.115.0412.---	9	20.223.0412.---	15	20.506.0500.---	19	20.607.0500.---	23	20.704.0402.---	26, 33
20.115.0422.---	9	20.223.0422.---	15	20.506.1500.---	20	20.607.5500.---	23	20.706.0901.---	26, 33
20.115.1412.---	10	20.223.5412.---	15	20.506.2500.---	21	20.607.6500.---	23	20.708.0902.---	26, 33
20.115.1422.---	10	20.223.5422.---	15	20.507.0500.---	19	20.610.0500.---	23	20.712.0500.---	26, 33
20.115.2412.---	11	20.223.6412.---	15	20.507.1500.---	20	20.610.5500.---	23	20.718.0500.---	26, 33
20.115.2422.---	11	20.223.6422.---	15	20.507.2500.---	21	20.620.0411.---	24	20.801.0500.---	29
20.146.0500.---	9	20.225.0500.---	12	20.512.0411.---	19	20.620.0421.---	24	20.801.1500.---	30
20.146.1500.---	10	20.225.6500.---	12	20.512.0421.---	19	20.620.0421.---	24	20.801.2500.---	31
20.146.2500.---	11	20.227.0500.---	12	20.512.1411.---	20	20.620.5411.---	24	20.803.0500.---	29

Part#	Page	Part#	Page	Part#	Page
20.803.1500.---	30	22.128.0000.---	35	26.700.0500.035	40
20.803.2500.---	31	22.130.0000.426	35	26.702.0500.035	40
20.805.0500.---	29	22.134.0000.426	35	26.710.0500.035	40
20.805.1500.---	30	22.138.0000.426	36	26.712.0500.035	40
20.805.2500.---	31	22.142.0000.426	36	99.110.0000.999	42
20.807.0500.---	29	22.150.0000.---	36		
20.807.1500.---	30	22.154.0000.---	36		
20.807.2500.---	31	22.156.0000.---	36		
20.809.0500.---	29	22.158.0000.---	36		
20.809.1500.---	30	22.200.0000.---	35		
20.809.2500.---	31	22.204.0000.---	35		
20.841.0500.---	32	22.208.0000.---	35		
20.841.6500.---	32	22.228.0000.---	35		
20.843.0500.---	32	22.230.0000.426	35		
20.843.6500.---	32	22.234.0000.426	35		
20.845.0500.---	32	22.238.0000.426	36		
20.845.5500.---	32	22.242.0000.426	36		
20.845.6500.---	32	22.250.0000.---	36		
20.847.0500.---	32	22.254.0000.---	36		
20.847.5500.---	32	22.256.0000.---	36		
20.847.6500.---	32	22.258.0000.---	36		
20.849.0500.---	32	26.102.0400.---	39		
20.880.0500.---	33	26.104.0400.---	39		
20.882.0401.---	33	26.106.0400.---	39		
20.884.0402.---	33	26.132.0400.---	39		
20.886.0901.---	33	26.134.0400.---	39		
20.888.0902.---	33	26.136.0400.---	39		
20.890.0510.---	33	26.162.0000.505	39		
20.890.0520.---	33	26.164.0000.505	39		
20.902.0000.010	37	26.166.0000.505	39		
20.904.0000.010	37	26.170.0400.---	39		
20.912.0000.010	37	26.172.0400.---	39		
20.922.0000.010	37	26.174.0400.---	39		
20.924.0000.010	37	26.176.0900.---	39		
21.300.0500.---	17	26.178.0900.---	39		
21.302.0401.---	17	26.180.0900.---	39		
21.304.0402.---	17	26.182.0400.---	39		
21.306.0901.---	17	26.184.0400.---	39		
21.308.0902.---	17	26.186.0400.---	39		
21.310.0510.---	17	26.188.0900.---	39		
21.310.0520.---	17	26.190.0900.---	39		
21.320.0500.---	17	26.192.0900.---	39		
21.400.0000.010	38	26.194.0000.---	39		
21.402.0000.010	38	26.196.0000.---	39		
21.420.0000.010	38	26.198.0000.---	39		
21.422.0000.010	38	26.200.0000.114	40		
21.424.0000.010	38	26.201.0000.550	40		
21.426.0000.010	38	26.202.0400.---	41		
21.440.0000.010	38	26.202.0900.---	41		
21.900.0500.---	27	26.204.0400.---	41		
21.902.0401.---	27	26.204.0900.---	41		
21.904.0402.---	27	26.206.0000.010	41		
21.906.0901.---	27	26.300.0600.---	41		
21.908.0902.---	27	26.301.0000.426	42		
21.910.0510.---	27	26.310.0000.565	42		
21.910.0520.---	27	26.320.0000.570	42		
21.920.0500.---	27,33	26.330.0000.505	42		
22.100.0000.---	35	26.332.0000.505	42		
22.104.0000.---	35	26.400.0500.426	42		
22.108.0000.---	35	26.404.0000.426	42		



General overview: Locks and hardware for glass

Catalogue



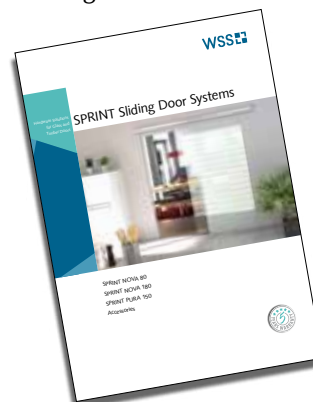
STUDIO Hardware
New perspectives through innovations. Top quality finishes. Locks and hinges for residential homes and commercial properties – with magnetic latches too.

Catalogue



OBJEKT Hardware
A variety of possibilities. Top quality finishes. Locks and hinges for commercial properties – for panic doors too.

Catalogue



SPRINT Sliding Door Systems
Space-saving and multi-functional, with SOFT-STOP, dual system. Open up your rooms with SPRINT!

Basic catalogue



Locks and Fittings for Glass

The complete catalogue contains all of our products for interior and exterior doors.

Info brochure



Locks and clamp hardware for exterior doors

Flexible and clever: for the highest demands on security for whole glass systems.



Download:
www.wss.de/service/e-katalog-portal



Wilh. Schlechtendahl & Söhne
GmbH & Co. KG

Hauptstrasse 18–32
42579 Heiligenhaus
Germany

Tel: +49 (0) 20 56/17-0
Fax: +49 (0) 20 56/51 42

wss@wss.de
www.wss.de

Legal venue 42579 Heiligenhaus,
District Court Wuppertal, HRA 20804

Managing Directors: Guido Lücker, Robin Fasel

VAT ID No.: DE 121546484
Tax no.: 13957280071

All images, product, dimensions and design details are related to the date of publishing. We reserve the right to changes in the interests of technical progress and further developments. No liability for printing errors or other technical mistakes. No legal claims of whatever kind can be derived from the use of our documents. Reprints of this document, even in part, require our written approval.

Express reference is made to our general terms and conditions of business, available at www.wss.de.